OLYMPUS®

Stylus® 1000

Designed to Do More.™

Premium quality images. Unparalleled performance.

Digital Image Stabilization

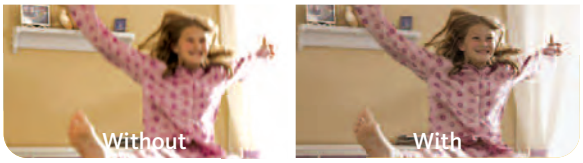

Digital Image Stabilization Mode *lets you capture sharp images free from the blur sometimes caused by camera shake or moving subjects.* ***Digital Image Stabilization Edit*** *lets you retouch unanticipated blurry pictures in your camera.*

Bright Capture Technology

See what you're shooting even in the dark. When you're ready, just frame it and take the picture.

Perfect Fix

Activate three different editing features to make your pictures perfect.

Digital Image Stabilization Edit corrects the blurs.

Lighting Fix adjusts the underexposed area.



Red-Eye Fix gives you beautiful portraits.

- **10 Megapixel CCD** Get sharp, high-resolution and high-quality photos regardless of the print size.
- **Digital Image Stabilization** Shoot with Digital Image Stabilization Mode to capture crisp, clear images. Sharpen with Digital Image Stabilization Edit right in the camera to correct any blurry images.
- **All-Weather** Shoot in rain or shine, at the beach or on the slopes. Sealed and coated in all the right places, the Stylus® 1000 resists water, snow and dust.
- **Bright Capture Technology** Low light is no problem. Even when it's too dark for your eyes to see, you can preview your subject clearly on the LCD, then capture an image that's clear and bright without having to use a flash. Plus, Bright Capture Movie lets you record the moments in the dark even after the candles are blown out!
- **15x Total Seamless Zoom** 3x optical zoom plus 5x digital zoom moves you closer to your subject without taking a step.
- **2.5" LCD** Previewing, composing, shooting and sharing are so much easier and more enjoyable with this bright, premium-sized LCD.
- **TruePic TURBO™ Image Processor** With this exclusive technology, you not only get truer colors – you also get quicker start-up and shutter release times so you can shoot faster.
- **24 Shooting Modes including QuickTime® Movie with Sound** Take the best shots in any situation with advanced shooting options such as Landscape, Portrait, Indoor, Night Scene and more.
- **Perfect Fix** With this Olympus Stylus 1000 feature, a less-than-perfect shot can still turn out perfectly! Lighten up shadows, remove red-eyes and eliminate blurs quickly and easily.
- **Built-In Help Guide** A brief in-camera description helps you quickly choose the ideal setting for each situation and purpose. An improved Shooting Guide even sets the camera for you automatically.

Megapixel	Optical Zoom	Total Zoom	All-Weather	Digital	Color	Auto	Movie
10 Effective	3x Zoom	15x Optical & Digital	Construction	Image Stabilization	2.5" LCD	USB Connect	With Audio

Downloaded from www.Manualslib.com manuals search engine

OLYMPUS®

Stylus® 1000
Designed to Do More.™

Olympus® Stylus 1000 Specifications

Stock No. 225855

Imager:	10.0 Megapixel (effective), 10.0 Megapixel gross, 1/1.8" (1.41cm) CCD
Lens:	7.4 – 22.2mm (35 – 105mm equivalent in 35mm photography), 6 lenses in 4 groups, 4 aspherical lenses
Zoom:	3x Optical Zoom + 5x Digital Zoom (seamless to 15x) 5x Fine Zoom (3 Megapixel)
Aperture Range:	f2.8 – f4.7
LCD:	2.5" (6.4cm) Color LCD, approx. 230,000 pixels
Focus System:	CCD Contrast Detection
Focus Range:	Normal Mode: 23.6" – infinity (0.6m – infinity) Macro Mode (Wide): 11.8" – infinity (0.3m – infinity) Macro Mode (Tele): 19.7" – infinity (0.5m – infinity) Super Macro Mode: 3.9" – 23.6" (10 – 60cm)
Focus Mode:	iESP Auto, Spot AF
Shutter Speed:	1/1000 sec. – 1/2 sec. (up to 4 sec. in Night Scene Mode)
ISO:	Auto, 64, 100, 200, 400, 800, 1600*1, 3200*2, 6400*2 (equivalent)
Metering Mode:	Digital ESP Multi-Pattern, Spot Metering
White Balance:	iESP2 Multi-Pattern Auto TTL, Pre-Set (Daylight, Overcast, Tungsten, Fluorescent1, Fluorescent2, Fluorescent3)
Exposure Compensation:	±2 EV steps in 1/3 EV steps
Recording Modes:	Still Image: JPEG Movie: QuickTime® motion JPEG
Adjustment Resolutions:	3,648 x 2,736, SHQ / HQ 2,560 x 1,920, SQ1 2,304 x 1,728, SQ1 2,048 x 1,536, SQ1 1,600 x 1,200, SQ2 1,280 x 960, SQ2 1,024 x 768, SQ2 640 x 480, SQ2 1,920 x 1,080, 16:9
Shooting Modes:	24 Shooting Modes: Auto, Program Auto, Scene Preset (Portrait, Landscape, Landscape & Portrait, Night Scene, Night & Portrait, Sport, Indoor*1, Candle*2, Self-Portrait, Available Light Portrait*2, Sunset, Fireworks, Museum, Cuisine, Behind Glass, Documents, Auction*3, Shoot & Select1, Shoot & Select2, Beach & Snow), Digital Image Stabilization Mode*1, Movie
Panorama:	Up to 10 frames automatically stitchable with OLYMPUS Master Software when using Olympus brand xD-Picture Card™
Sequential Shooting:	High speed: 3.6 frames per second up to 12 frames in SQ1 mode
Shooting Assist Functions:	Histogram, Frame Assist
Shooting Edit Effects:	Frame
Movie Mode:	QuickTime® Movie with Sound: 640x480/30fps, SHQ; 320x240/30 fps, HQ; 160x120/15fps, SQ
Image Processing:	TruePic TURBO™ Image Processor
Pixel Mapping:	Automatic Pixel Mapping (APM) available via menu setting
Noise Reduction:	Set automatically at shutter speeds of 0.5 seconds or longer
Image Playback:	Still Image: Single, Index Display (4/9/16/25), Up to 10x Enlargement, Slideshow, Rotation, Calendar, Album, Histogram Movie: Normal, Reverse, Frame-By-Frame
Playback Edit Effects:	Still Image: Digital Image Stabilization Edit, Lighting Fix, Red-Eye Fix, Resize, Trimming, Rotation, Black & White, Sepia, Frame, Title, Calendar, Layout, Brightness, Saturation Movie: Movie Edit, Frame Index
Direct Printing Options:	PictBridge™ and DPOF
Flash:	Built-in
Flash Modes:	Auto (for low-light and backlit conditions), Red-Eye Reduction, Fill-In, Off
Flash Working Range:	Wide: 17.1 ft. (5.2m), Tele: 10.5 ft. (3.2m)
Self-Timer:	12 Seconds/Auto
Settings Memorization:	On/Off (Hold changes/Reset to default settings)
Date/Time Calendar:	Simultaneous recording into image data, Automatic up to 2099
Memory:	28.5MB internal memory
Removable Media Card:	xD-Picture Card™ (16, 32, 64, 128, 256, 512MB, 1GB or 2GB)
Outer Connectors:	Multi-terminal (USB connecter, Audio/Video output, DC input*) *Optional DC coupler (CB-MA1) is required.
Auto-Connect USB:	2.0 Full Speed (USB mass storage)
System Requirements:	Auto-Connect USB: Windows® 98SE/ME/2000PRO/XP with USB Port, Mac OS® 9.0-9.2x/OS X 10.1-10.4 with USB port Software: Windows 98SE/ME/2000PRO/XP, Mac® 10.2 and higher
Operating Environment:	Operation: 32° – 104°F (0° – 40°C), 30% – 90% humidity Storage: -4° – 140°F (-20° – 60°C), 10% – 90% humidity
Power Supply:	Li-Ion Rechargeable Battery (LI-12B), AC Adapter (D-7AC) with the Optional DC Coupler (CB-MA1)
Size:	3.8" W x 2.2" H x 0.89" D (97.0mm x 56.2mm x 22.7mm)
Weight:	4.9 oz. (140g) without battery and media card

*1 Works with Bright Capture. *2 Works with Bright Capture. Image size is automatically changed to 2,048 x 1,536. *3 Image quality is limited to 640 x 480.

getolympus.com

Available Accessories

Olympus xD-Picture Card™
256MB
512MB
1GB
2GB

Leather Case (Vertical, Top-Loading)
200398

LI-12B Lithium Ion Battery
200838

MAUSB-200 xD-Picture Card USB Reader/Writer
202049

202066	Neoprene Compact Camera Case
200496	Metal Neck Strap
200830	MAUSB-10 xD-Picture Card™/ SmartMedia™ USB Reader/Writer
200846	LI-10C Replacement Charger
200850	D-7AC AC Adapter
202053	CB-MA1 DC Coupler (For Use With D-7AC)
200372	CB-USB6 Digital Camera USB Cable (Replacement)
200347	CB-AVC3 Digital Camera A/V Cable (Replacement)
202044	2-Year Extended Digital Warranty

Package Contents

- Stylus 1000 Digital Camera
- LI-12B Li-Ion Rechargeable Battery and Charger
- USB Cable, Audio/Video Cable
- Wrist Strap
- Quick Start Guide
- Basic Manual
- 2 CD-ROMs (OLYMPUS Master Software and Advanced Manual)
- Warranty Card

TruePic TURBO · PictBridge · PRINT Image Matching · Exif Print · xD-Picture Card™ · QuickTime

Olympus Digital Still Cameras can be used with confidence wherever you go. They are backed by a one-year repair warranty service that is available worldwide. Please contact our service center or check the Authorized Distributors list for service and applicable areas of service. May not be available in all areas.

Specifications subject to change without notice or obligation on the part of the manufacturer.

© 2006 Olympus Imaging America Inc. All rights reserved. Printed in the United States of America. Olympus and Stylus are trademarks or registered trademarks of Olympus Corporation, Olympus Imaging America Inc. or their affiliated entities. All trademarks and registered trademarks listed herein are the property of their respective holders.

D1350-0806

Downloaded from www.Manualslib.com manuals search engine